

ISBA

IN-LINE SWIVEL WITH RECONNECTABLE BREAKAWAY



A Simple Two-In-One Solution

Catlow combines our in-line swivel with our advanced breakaway technology to create an all-in-one swivel breakaway. Thanks to its 360-degree rotation, the swivel allows comfortable nozzle use for customers and helps control hose movement while extending the life of the hose. Meanwhile, the breakaway separates cleanly and reliably with a 30-degree angle, preventing drive-off damage to the dispenser and making inspections easier.

The integrated design uses dual poppets that prevent fuel leakage from both the hose and nozzle sides during separation. Two weather-resistant O-ring seals add even more protection against leakage, while accommodating a wide range of fluids, fuels and temperature fluctuations. Our integrated swivel breakaway is engineered to be durable, versatile and cost-saving.



ISBA-DEF

200
PSI

HIGH PRESSURE
LINE SHOCK
RESISTANCE

-40F
DEGREE

SUPERIOR
COLD WEATHER
PERFORMANCE


12
MONTH

WARRANTY

ISBA

IN-LINE SWIVEL WITH RECONNECTABLE BREAKAWAY

TECHNICAL DATA

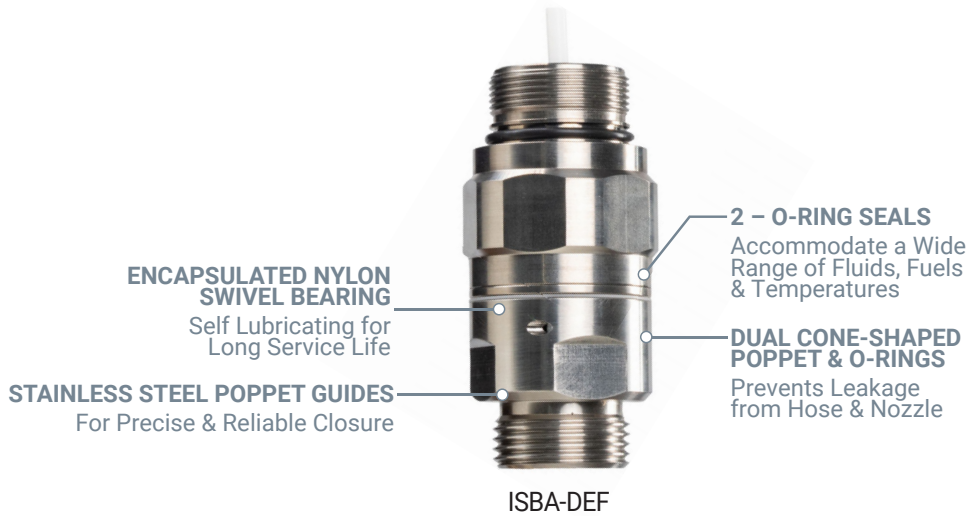

Features & Benefits

- UL Listed for use in gasoline, diesel, ethanol blends up to E85 and biodiesel blends up to B20
- Integrated breakaway saves on installation cost of separate swivel and breakaway
- Eliminates the need for a Whip Hose
- Compatible with all gas, diesel and alternative fuel types including DEF fluid
- 360-degree nozzle rotation for easy handling and hose control
- 30-degree separation angle
- Mates with thread types: M34, NPT and BSPP
- Minimal flow restriction
- Available in most popular thread types and sizes
- Climate ready for extreme temperatures -40°C to 52°C (-40°F to 125°F)

ISBA MODELS

ISBA-100N | 1" M to 1" F NPT SWIVEL/BREAKAWAY | *Compatible with Diesel (Biodiesel up to B20)*

ISBA-E25 | M34 M to 3/4" F NPT INLINE SWIVEL/BREAKAWAY | *Compatible with ERGO Gas (Ethanol up to E25); Diesel (Biodiesel up to B20)*

ISBA-75N | 3/4" M to 3/4" F NPT INLINE SWIVEL/BREAKAWAY | *Compatible with Gas (Ethanol up to E25); Diesel (Biodiesel up to B20)*

ISBA-DEF | M34 Male to 1" Male BSPP DEF INLINE SWIVEL/BREAKAWAY | *Compatible with Diesel Exhaust Fluid (DEF)*